

Terma Dexter



Terma Dexter to sztandarowy model drabinki łazienkowej tej marki. Zdobywca wielu nagród m.in. za nowoczesny design.

Specyfikacja:

- ciśnienie robocze 800 kPa
- maksymalna temperatura pracy 95 st. C
-

Dostępne modele

A ↓ [mm]	B ↔ [mm]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
paint							
860	400	400	350	680	90	2.70	9.51
860	500	400	450	680	90	2.99	11.07
860	600	600	550	680	90	3.27	12.64
1220	400	400	350	1040	90	3.82	13.33
1220	500	600	450	1040	90	4.21	15.52
1220	600	800	550	1040	90	4.61	17.7
1760	400	600	350	1580	90	5.55	19.41
1760	500	800	450	1580	90	6.14	22.64
1760	600	1000	550	1580	90	6.72	25.86
Galvanic coating							
860	400	200	350	680	90	2.70	9.26
860	500	300	450	680	90	2.99	10.77
860	600	400	550	680	90	3.27	12.29
1220	400	300	350	1040	90	3.82	12.98
1220	500	400	450	1040	90	4.21	15.1
1220	600	400	550	1040	90	4.61	17.22
1760	400	400	350	1580	90	5.55	18.9
1760	500	600	450	1580	90	6.14	22.02

Podłączenia

GRZEJNIKI C.O. PODŁĄCZENIA
STANDARDOWE



GRZEJNIKI C.O. PODŁĄCZENIA OPCJONALNE






GRZEJNIKI ELEKTRYCZNE



Wymiary

SX

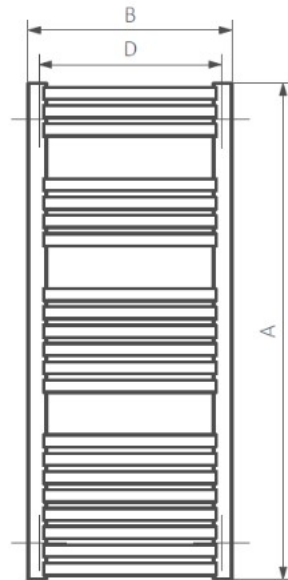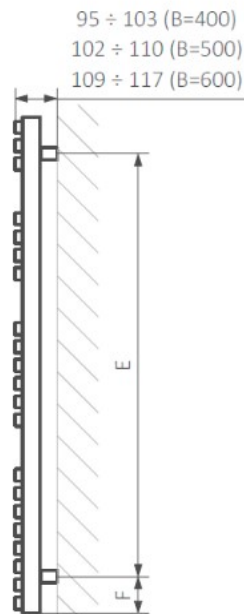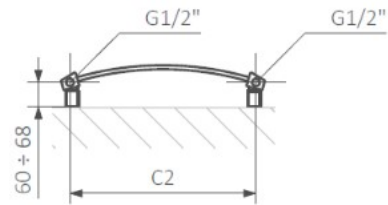

ZX

